


# LIBERTY™ LINER II

VSDT



## *Gel Liner – Evacuation Valve with Distal Attachment*

ALPS™ Liberty Liner II allows the expulsion of sweat and air through a built-in valve either through the pin or reducer. The one-way evacuation valve has been strategically placed distally to evacuate any air between the user's skin and the liner.

- Provides superior fit
- Built-in valve to expel air
- Liner can be used for pin-lock and suction suspension systems
- Available in 6mm uniform thickness



LDA-764 Liberty Liner II Reducer with Built-in Valve - Sold Separately  
LDP-764 Liberty Liner II Pin with Built-in Valve - Sold Separately




Covered by one or more of the following US Patent No.  
6,454,812 7,709,570



Tel: +420 37 72 23 127  
www.easyliner.eu | info@easyliner.eu


# Cross Section Diagram

6mm Uniform

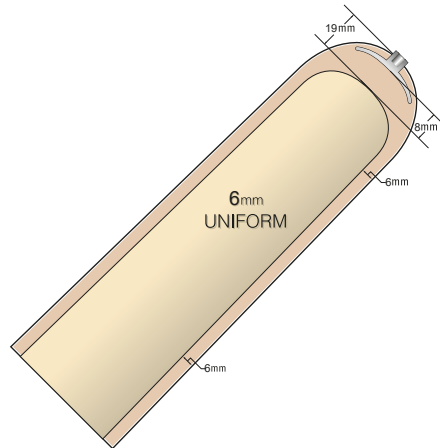


## How to Size

Measurements taken 6cm from the distal end

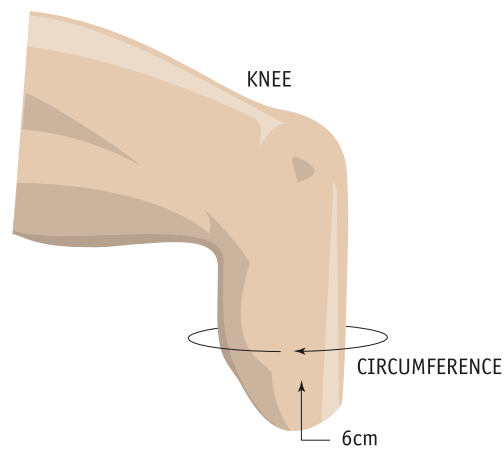

## Sizing Chart

Measured Size (cm)	 Locking 6mm Uniform
20-23 cm	VSDT <b>20-6</b>
24-25 cm	VSDT <b>24-6</b>
26-27 cm	VSDT <b>26-6</b>
28-31 cm	VSDT <b>28-6</b>
32-37 cm	VSDT <b>32-6</b>

ALPS SOUTH EUROPE S.R.O.  
Božkovské náměstí 17/21  
32600 Plzeň – Czech Republic  
Tel. +420 37 72 23 127 Email: info@easyliner.eu